

# WeatherTech®

## No-Drill MudFlap

### Installation Instructions

Thank you for purchasing the WeatherTech® No-Drill MudFlap. Please read this installation guide to thoroughly familiarize yourself with the steps to install the MudFlap on your vehicle. When properly installed, the WeatherTech® No-Drill MudFlap will provide you with years of protection.

#### Tools Needed



- 1/4" Drive Socket Set
- Stubby Phillips screwdriver
- Small Flat Blade Screwdriver
- 7/16" Box end wrench

#### Hardware




- Parts Kit (E)  
(2) 1/4 x 20 x 1" bolt and nut

#### ⚠ WARNING ⚠

The MudFlap is designed to fit vehicles with standard size wheels and tires. Installation of MudFlaps on vehicles with aftermarket wheels or oversize tires may interfere with the MudFlap, will void the warranty and may damage the MudFlap or the vehicle.

- 1 Start by thoroughly washing your vehicle. Take care to remove all dirt, debris, and stains from each fender in the areas corresponding to where the MudFlaps will be installed.

- 2 Begin driver's side MudFlap installation by parking the vehicle on level ground with wheels turned fully to the left.

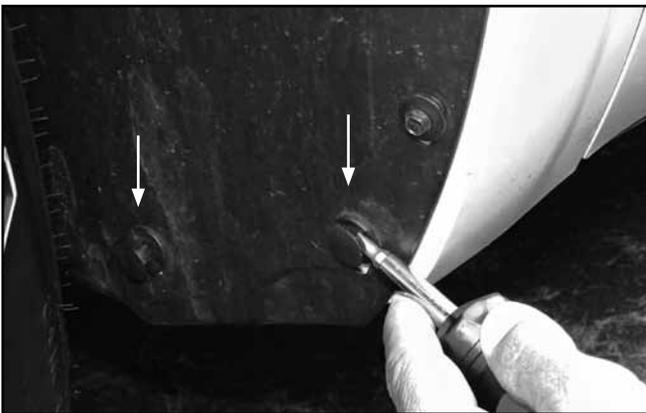

- 3 Using the small blade screw driver, remove the center portion of the (2) plastic rivets holding the plastic liner in place. After removal of the center portion, the outer body of the rivet can be removed. Retain (1) rivet for reuse.



- 4 Use the ratchet with an appropriate socket to remove the (2) hex head screws holding the plastic fender liner. Save these screws as they will be reused.

[View Easy Installation Video](#)  
[WeatherTech.com/install](http://WeatherTech.com/install)

Questions? Call customer service at 630 769 1500  
Monday - Friday: 9 a.m. to 5 p.m. Central Time



- 5** Press the MudFlap against the fender for a tight fit. Insert and snug the hex-head screws removed in step 3. **IMPORTANT** - Do not fully tighten at this time.



- 6** Using (1) of the previously removed plastic rivets, remove the inner core of the rivet. Place the outer body of the rivet through the hole (as shown) and into the hole in the metal fender. Firmly press the rivet body completely through the MudFlap and into the hole (the rivet body should be snug against the MudFlap). While holding the rivet body tightly to the MudFlap and against the fender, place the inner core of the rivet into the body and firmly press in inner core.



- 7** Using the ¼ x 20 x 1" bolt, put the bolt through the inner most hole of the MudFlap and through the plastic liner and metal behind it. Using the matching nut, you will be able to reach behind the MudFlap and feel the end of the bolt. Attach the nut to the bolt with the serration on the nut towards the head of the bolt. Hand-tighten the bolt and nut.

- 9** Begin passenger side installation by parking the vehicle on the level surface with the wheels turned fully to the right. Repeat steps 3-8.



- 8** While pressing the MudFlap tight against the fender, tighten the (2) hex head screws and previously installed bolt and nut.

## Congratulations!

Your new WeatherTech®  
No-Drill MudFlaps have been installed!

Your WeatherTech® No-Drill MudFlap carries a Lifetime Warranty against defects in materials and workmanship when installed correctly.

[View Easy Installation Video](#)  
[WeatherTech.com/install](http://WeatherTech.com/install)

Questions? Call customer service at 630 769 1500  
Monday - Friday: 9 a.m. to 5 p.m. Central Time