

INSTALLATION & CARE




UNIVERSAL VEHICLE COVER INSTALLATION


BEFORE INSTALLATION:

- Read entire installation instructions before proceeding
- Make sure vehicle is clean and dry
- Check for any sharp objects on the vehicle that may damage the cover


1. Unroll cover from front to back

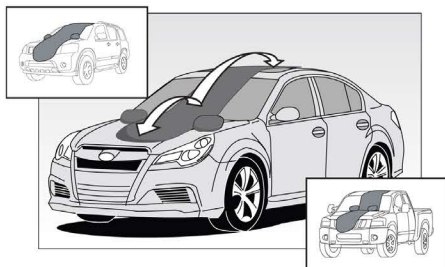


2. Unfold outward (first install mirror pockets over each rear-view mirror, if applicable)

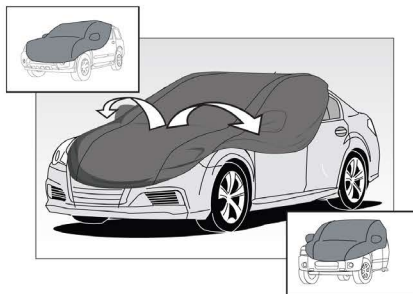

3. Pull cover over front and rear bumpers (The elastic will keep the cover in place under normal conditions)

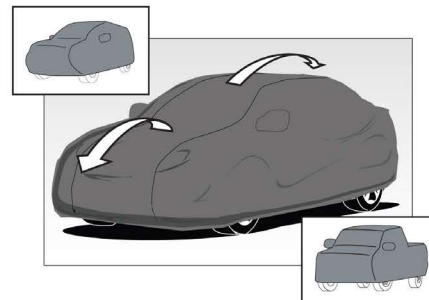

4. (Optional/Not-Included) Secure with Lock & Cable Kit (Using the grommets)

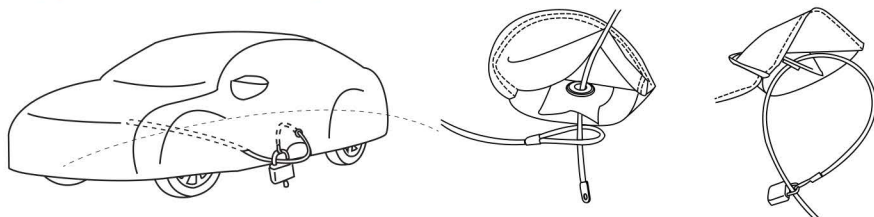

5. Removal

- Fold up both sides of the cover onto the top of the vehicle into a long strip (2' wide)
- Start at the rear and roll cover toward the front
- Store the cover in a storage bag when not in use

6. Vehicle Cover Care

WASHING/DRYING/REPAIR


- DO NOT machine wash Satin Stretch vehicle covers - hand wash or dry clean only.
- All other vehicle covers should be ONLY washed in a commercial machine, on cold, with mild detergent.
- DO NOT place in a dryer - air dry only
- To wash by hand, install the cover on your vehicle in a shaded area and hose off any loose dirt. If necessary, wash it further with a soft sponge or cloth soaked in mild, bio-degradable cleaner. Hose it down again and hang to air dry. To clean the inside, simply install the cover inside-out and follow the same steps.
- To repair small punctures, seal with Shoo Goo 2 (available at most sporting goods stores)



DO NOT
MACHINE
WASH



HAND
WASH
ONLY



DO NOT
MACHINE
DRY

IMPORTANT WARNINGS:

- Do not cover a recently painted vehicle immediately. Check with your painter or body shop for recommended cure time. Premature use of a cover in this situation could result in damage to repainted surfaces or lacquer paint. Coverking is not liable for this damage.
- Do not cover a wet vehicle
- Do not cover a vehicle with convertible top down, windows or sunroof open, or T-tops removed
- Do not use a cover while trailering vehicle
- Do not remove the cover in the unusual circumstance that a layer of ice has formed between the cover and the vehicle. Pour warm water over the cover to expedite thawing, as this ice must be thawed before removal.
- Do not rely solely on the elasticized bottom of the cover in even moderate winds.
- Utilize the integrated security grommets in any substantial wind is expected. If high wind conditions are present (30+mph), remove the cover.
- Coverking's liability is limited up to the cost of the product's purchase price.