



INSTALLATION INSTRUCTIONS

Part Number: VF2008

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

* FREE K&N® decal To register your warranty, please see us online at knfilters.com/register. FREE K&N® decal *

K&N® Cabin Air Filters replace your vehicle's stock cabin filter with a reusable design that cleans and freshens incoming air. They are electrostatically charged to grab and hold dust particles. K&N® cabin air filters help control odors while they help capture most mold, mildew, fungus, spores, bacteria and germs. When they get dirty they can be cleaned and reused and best of all, they come with a 10 year/100,000 mile limited warranty.

1. Before opening the glove box, locate the clip holding the stop cable under glove box. Remove screw to allow the clip to remove the stop cable from bracket. Fig. 1&2
2. Open glove box and apply pressure to the sides of the glove box pushing into the center. This will allow the glove box to hang free allowing access to the cabin filter housing. Fig. 3
3. Locate cabin filter housing and remove cabin filter cover. Fig. 4
4. Remove cabin filter tray from housing. Fig. 5
5. Remove dirty cabin filter. **NOTE: Remove any debris that might be present on cabin filter tray and inside the cabin filter housing. Fig. 6**
6. Install K&N® Cabin Filter. Cabin filter will only fit in one direction. Once filter is installed correctly, the filter will sit flush inside of tray. Fig. 7
7. Reverse steps 1-4 to complete cabin filter installation. With the cabin filter installed, clean an area on the housing and apply the K&N® Stop Decal. The decal will help notify others that this is a reusable cabin filter.



Fig.1

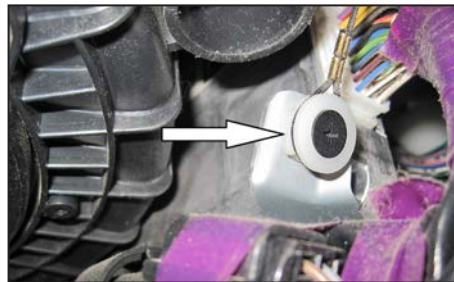


Fig.2



Fig.3



Fig.4



Fig.5



Fig.6



Fig.7

Please visit our website knfilters.com for a complete listing of other K&N® products for your vehicle, such as oil filters, air filters, and intake kits. We recommend refreshing your K&N® Cabin Air Filter every 12 months, or 12,000 miles. Use K&N® Refresher kit pt.# 99-6000 which includes the easy to follow instructions.